


HIGH-PERFORMANCE SCRAPER FOR CONVEYOR BELTS

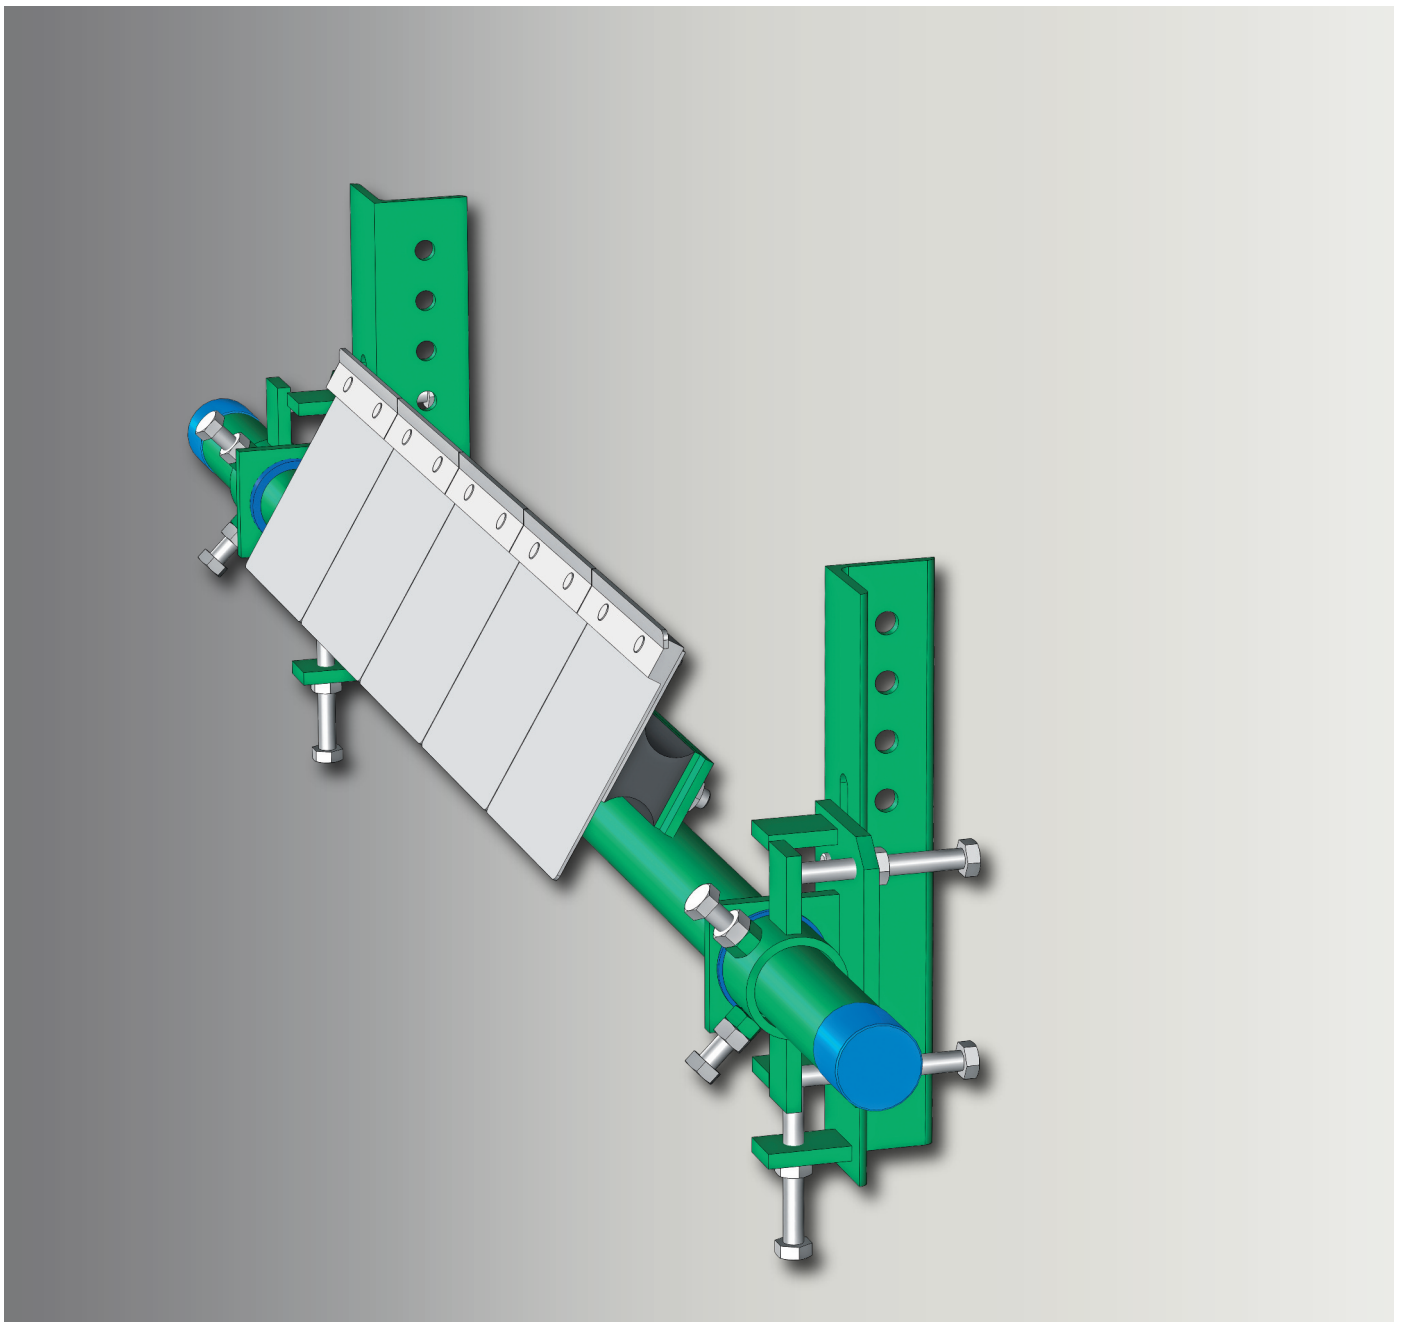


BELLE BANNE® P.F

Pioneer of High-Performance scrapers, the  BELLE BANNE® P.F scraper is fitted with several elements which act individually, each consisting of :

- A special CUSHION made of rubber which absorbs vibrations and provides an effective and pliable way of exerting pressure on the surface of the belt.
- A BLADE in very hard carbide alloy or optionally stainless steel.
- A non-sticky POLY-SHEET for aiding product flow.

The whole scraper is given a corrosion-prevention paint treatment and all fastenings are stainless.

The  BELLE BANNE® P.F scraper is installed to unidirectional conveyors ; coupled with the tangential scraper H, it becomes a finisher.

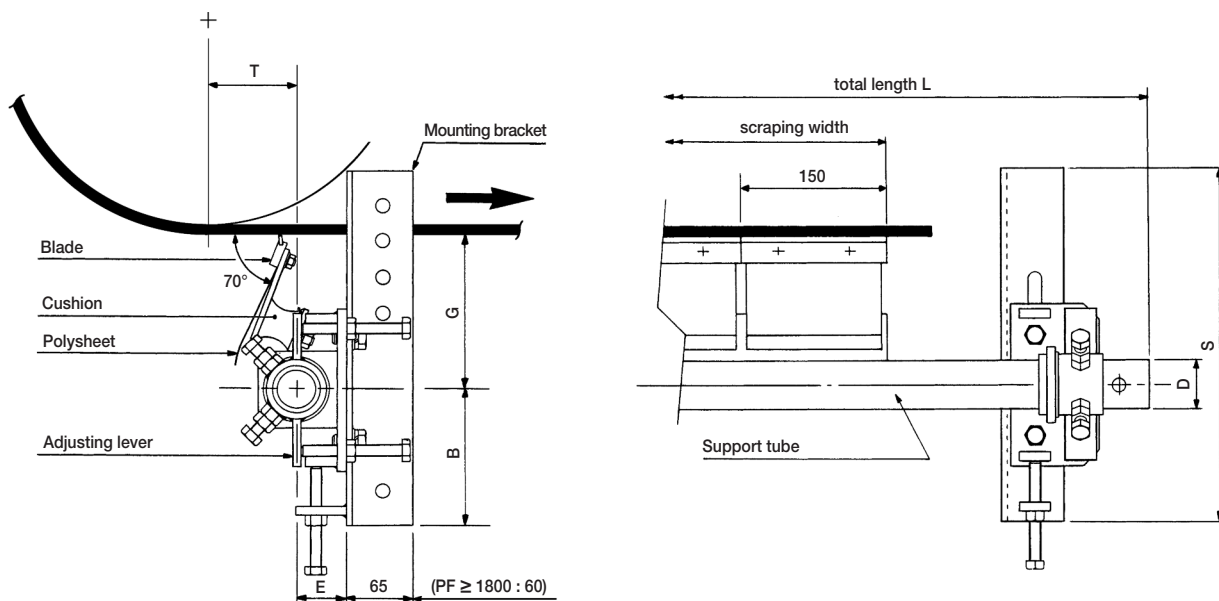

STANDARD PRODUCTION RANGE

The mounting brackets can be installed towards the front.

RÉFÉRENCE	STOCK	BELT WIDTH	SCRAPING WIDTH	N° OF BLADES	L	D	S	B	G	E	WEIGHT
P.F 400 x 300	*	400 - 300	300	2	1050	48,6	350	135	153	49	17 kg
P.F 500 x 450	*	500	450	3	1150	48,6	350	135	153	49	20 kg
P.F 650 x 600	*	650 - 600	600	4	1300	48,6	350	135	153	49	22 kg
P.F 800 x 750	*	800	750	5	1500	48,6	350	135	153	49	25 kg
P.F 1000 x 900	*	1000 - 900	900	6	1700	48,6	350	135	153	49	28 kg
P.F 1200 x 1200	*	1200	1200	8	2000	60,5	350	135	158	59	37 kg
P.F 1400 x 1350	*	1400	1350	9	2200	60,5	350	135	158	59	40 kg
P.F 1600 x 1500	*	1600 - 1500	1500	10	2400	60,5	350	135	158	59	43 kg
P.F 1800 x 1800	*	1800	1800	12	2700	76,3	400	160	170	70	65 kg
P.F 2000 x 1950	*	2000	1950	13	2900	76,3	400	160	170	70	70 kg

• All dimensions in mm.

Options :

- Intermediate or larger models
- Stainless fittings
- Mounting with offset support tubes

MATCHING SPARE PARTS

BLADES

- PS 150 standard blade 10 x 3
- PS 150 i stainless blade 10 x 3

CUSHIONS

- W standard cushion
- WS special cushion for :
 - speed 3 to 5 m/s
 - sticky coarse materials
- WH special cushion for :
 - temperature range 80 to 130°C
 - and fatty products

POLYSHEET

- P Polysheet