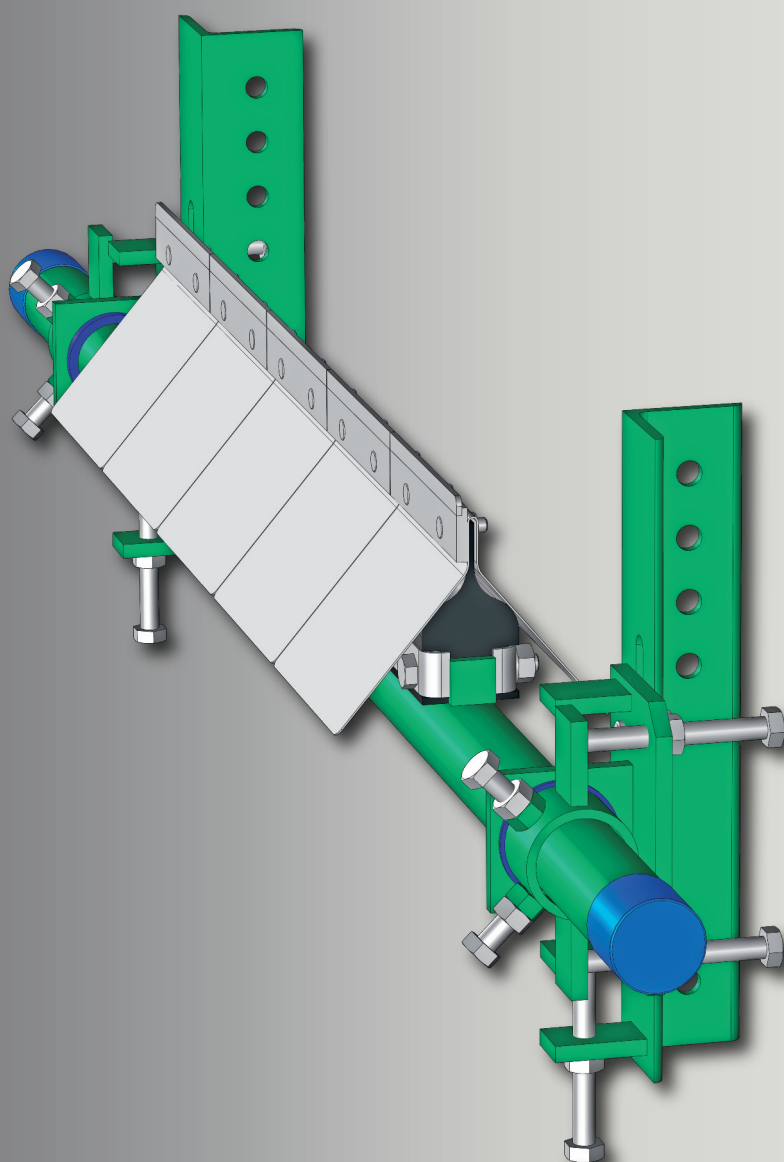



HIGH-PERFORMANCE SCRAPER FOR CONVEYOR BELTS

**BELLE BANNE[®] R.F**

The  **BELLE BANNE® R.F** scraper is fitted with several elements which act individually, each consisting of :

- A special **CUSHION** made of rubber which absorbs vibrations and provides an effective and pliable way of exerting pressure on the surface of the belt.
- A **BLADE** in very hard carbide alloy or optionally stainless steel.
- A non-sticky **POLYSHEET** for aiding product flow.

The whole scraper is given a corrosion-prevention paint treatment and all fastenings are stainless. The  **BELLE BANNE® R.F** scraper is installed to unidirectional and reverse conveyors ; coupled with the tangential scraper H, it becomes a finisher.

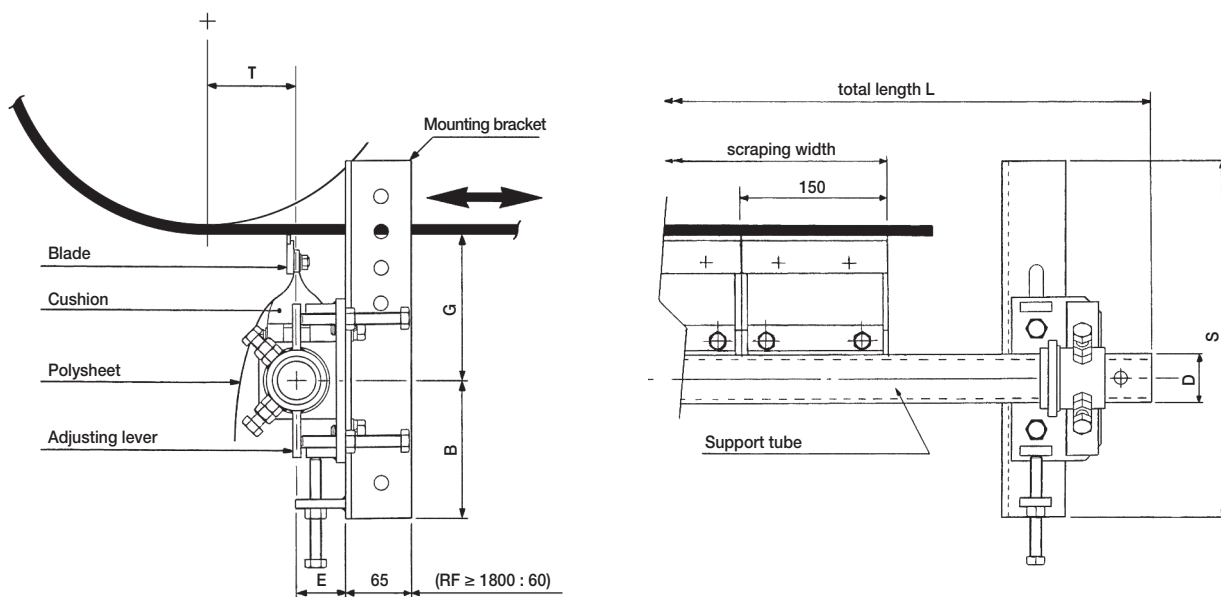

STANDARD PRODUCTION RANGE

The mounting brackets can be installed towards the front.

REFERENCE	STOCK	BELT WIDTH	SCRAPING WIDTH	N° OF BLADES	L	D	S	B	G	E	WEIGHT
R.F 400 x 300	*	400 - 300	300	2	1050	48,6	350	135	142	49	18 kg
R.F 500 x 450	*	500	450	3	1150	48,6	350	135	142	49	20 kg
R.F 650 x 600	*	650 - 600	600	4	1300	48,6	350	135	142	49	23 kg
R.F 800 x 750	*	800	750	5	1500	48,6	350	135	142	49	26 kg
R.F 1000 x 900	*	1000 - 900	900	6	1700	48,6	350	135	142	49	29 kg
R.F 1200 x 1200	*	1200	1200	8	2000	60,5	350	135	148	59	39 kg
R.F 1400 x 1350	*	1400	1350	9	2200	60,5	350	135	148	59	43 kg
R.F 1600 x 1500	*	1600 - 1500	1500	10	2400	60,5	350	135	148	59	46 kg
R.F 1800 x 1800	*	1800	1800	12	2700	76,3	400	160	156	70	69 kg
R.F 2000 x 1950	*	2000	1950	13	2900	76,3	400	160	156	70	73 kg

• All dimensions in mm.

- **Options :**
 - Intermediate or larger models
 - Stainless fittings
 - Mounting with offset support tubes

MATCHING SPARE PARTS

BLADES

- **RS 150** standard blade 10 x 3
- **RS 150 i** stainless blade 10 x 3

CUSHIONS

- **R55** standard cushion
- **RH** special cushion for :
temperature range 80 to 130°C
and fatty products.

POLYSHEET

- **R Polysheet**