

SEALING EDGES FOR BELT CONVEYORS





SPILL-EX® Sealing Edges are characterized by their technical design and high quality components; they have the following advantages:

- Simple and quick assembly on all conveyors.
- Perfect sealing thanks to precise adjustments on belts running on rollers or slider bars.
- Significant wear potential, 60 mm for type HD and 40 mm for type LP.
- Cuts the maintenance costs associated with the conveyor and its environment.

OTHER ADVANTAGES

- Easy assembly by welding or bolting in the smallest spaces.
- Metal parts treated against corrosion.
- Clamping stirrups allowing the stability of the settings and preventing any pushing of the seal outwards.
- Flexible rubber blocks, robust and independent of each other.

OPTIONS


- Made entirely of 304 or 316 stainless steel.
- Rubber blocks resistant to greasy products.
- Rubber blocks resistant to a temperature of 150°.
- Flame-resistant and antistatic rubber blocks.
- White non-food rubber blocks.

OG
HT
V
NW




SEALING EDGES

- 1) MOUNTING PLATE
- 2) HD POLYETHYLENE GUIDE
- 3) RUBBER SEALING BLOCK
- 4) CLAMPING STIRRUP
- 5) WASHER
- 6) BOLT

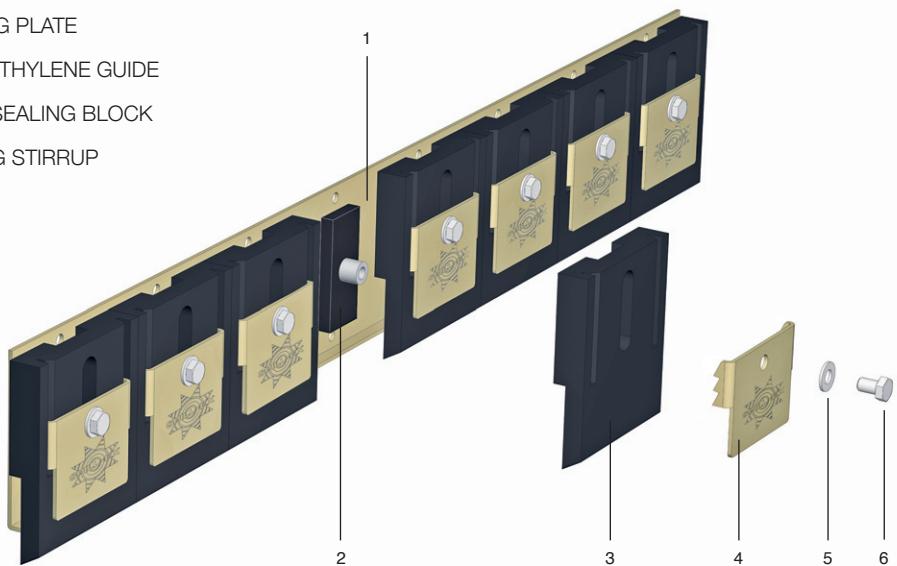

HDS - LPS

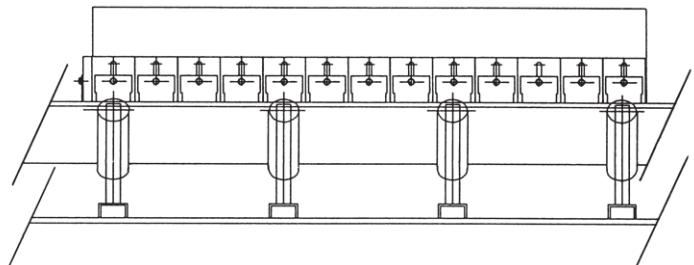


SIDE SEALING EDGES

HDS For Heavy Duty Handlings
WD 1200 mm - 8 blocks 150 x 200 - 30/20 mm

LPS For Light or Medium Handling
WD 1000 mm - 8 blocks 125 x 150 - 25/15 mm



HDR - LPR

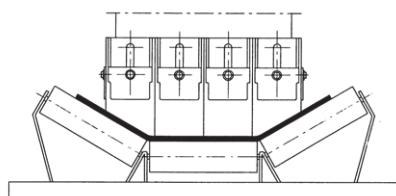

REAR SEALING EDGES

HDR For Heavy Duty Handlings
WD 1200 mm - 8 blocks 150 x 300 - 30 mm

LPR For Light or Medium Handling
WD 1000 mm - 8 blocks 125 x 250 - 25 mm
(in polyurethane)

BELLE BANNE**ROLLAX****SPILL-EX****FLEXAL****ACMAN****CENTRAX****SEALTEK****EXCALIBUR**

DISTRIBUTEOR :



14, rue de l'Industrie Zone Ind.
F - 33500 LIBOURNE

TÉL. : + 33 (0) 5 57 51 87 89
access.bt@hamsa.fr

REGIONAL REPRESENTATIVE: